




SPX 1040 EXT TRACKS



					
	6300 kg	650 kg	4T-D8: 40 kg	JIB1000FL: 310 kg	
	5305x1450x2050 mm		2,0 km/h		25°
	4500 kg		0,59 kg/cm ²		
	Engine: 3 cylinders water cooled diesel, ISUZU mod. 3CB1, 2 rpm levels, EPA TIER 4 Motore: 3 cilindri diesel raffreddato a liquido, ISUZU mod. 3CB1, 2 livelli di regime, EPA TIER 4 Motor: Wassergekühlter 3 Zylinder Diesel Motor, ISUZU mod. 3CB1, 2 rpm, EPA TIER 4 Motor: Diesel 3 cilindros con refrigeración por aire, ISUZU mod. 3CB1, 2 niveles rpm, EPA TIER 4 Moteur: Diesel 3 cylindres, refroidissement à eau, ISUZU mod. 3CB1, accélérateur à 2 niveaux, EPA TIER 4				
	8kW 400V-AC 3F		50 kg		
Telescopic Boom: 1 base and 3 telescopic sections high-tensile structural steel. All sections synchronized and full power. Braccio Telescopico: 1 braccio principale e 3 telescopici in acciaio strutturale ad alta resistenza. Sfilo completamente idraulico e sincronizzato. Teleskopausleger: 1 Hauptausleger + 3 Hochwiderstand Stahl Teleskopausleger. Voll hydraulischer und teleskopierbarer Ausleger. Pluma Telescópica: 1 pluma principal y 3 telescópicas en acero de alta resistencia. Elementos sincronizados e hidráulicos. Flèche Téléscofique: 1 flèche principale et 3 télescopiques en acier à haute résistance. Eléments synchronisés et hydrauliques.					
	360° 1rpm		-4°/80° 35"		
	4,6 - 14,5 m 40"		900 kg - 80 m - Ø 8 mm 30/55 m/min.		

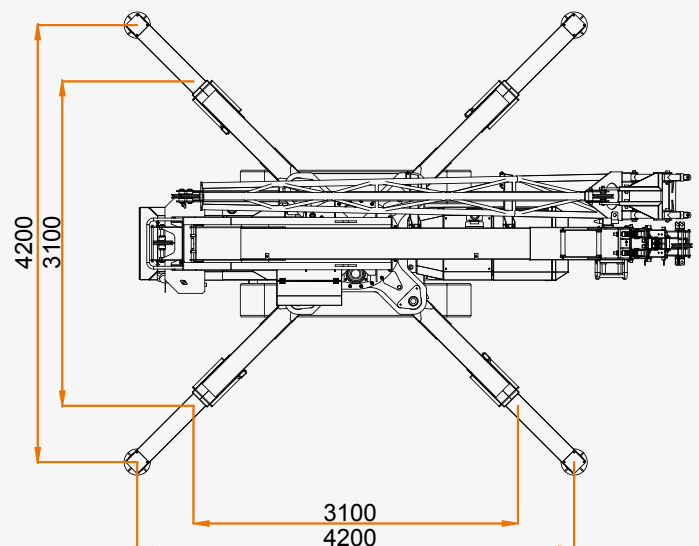

SPX 1040 EXT TRACKS

